

EFRP-2553

Power Supply for 2U Mini Redundant Servers

SPECIFICATION

Model Name
→ EFRP-2553

Size
→ 2U Redundant 1+1

Input Voltage
→ 100 V - 240 V

Connectors


Mother Board Connector 24 Pins	-	1
→ Core Voltage Connector 8 Pins	-	1
4 Pin Power Connector	-	8
FDD Power Connector	-	3

Ampere Rating	Voltage	Amperage
	+3.3 V	- 24.0A
	+5 V	- 20.0A
→	+12 V1	- 15.0A
	+12 V2	- 15.0A
	+12 V3	- 18.0A
	-12 V	- 0.8A
	+ 5 VSB	- 2.0A

Total Output
→ 550W + 550W

Recommended Chasis

- RM-210
- RM-217
- RM-2121
- RM-23608
- RM-23612
- RM-23524
- RM-2003
- RM-3001

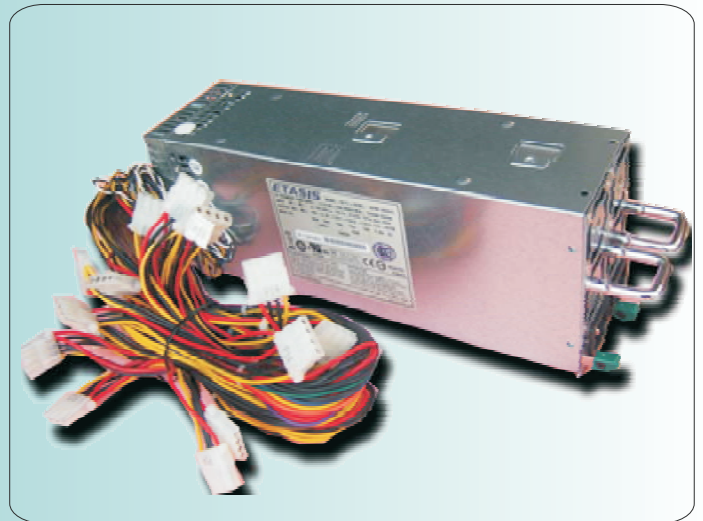

● EFRP-2553



Prime Source Technologies Pvt. Ltd.
Web site : www.primesource.in