

FSP-700-80REV1

Power Supply for 2U Mini Redundant Servers

SPECIFICATION

Model Name

→ FSP-700-80REV1

Size

→ 2U Redundant 1+1

Input Voltage

→ 100 V - 240 V

Connectors

Mother Board Connector 24 Pins	- 1
→ Core Voltage Connector 8 Pins	- 1
Core Voltage Connector 4 Pins	- 1
PCI Express Connector 6+2 Pins	- 1
SATA Power Connector	- 2
4 Pin Power Connector	- 6
FDD Power Connector	- 1

Ampere Rating


Voltage	Amperage		
+3.3 V	- 24.0V	} Max.	} Max.700W
+5 V	- 30.0V		
→ +12 V1	- 18.0V	} Max.	} Max.700W
+12V2	- 18.0V		
+12V3	- 18.0V		
-12 V	- 0.5V		
-5 V	- 0.2V		
+5VSB	- 3.0V		

Total Output

→ 700W

Recommended Chassis

- RM-210
- RM-23524
- RM-217
- RM-2121
- RM-2003
- RM-3001

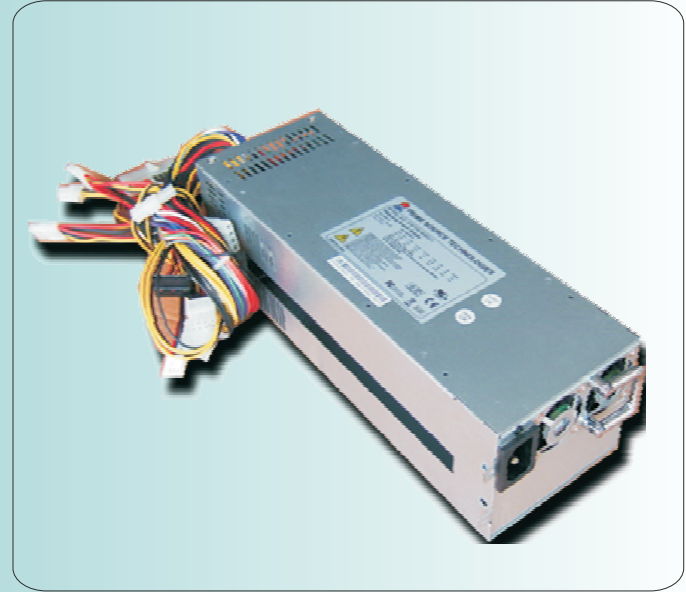

FSP-700-80REV1

