

TC-350R2U

Power Supply for 2U Servers

SPECIFICATION

Model Name
→ TC-350R2U

Size
→ 2U Redundant 1+1

Input Voltage
→ 100 V - 240 V

Connectors


| | |
|---------------------------------|-----|
| Mother Board Connector 24 Pins | - 1 |
| Core Voltage Connector 4 Pins | - 1 |
| → Core Voltage Connector 8 Pins | - 1 |
| SATA Power Connector | - 2 |
| 4 Pin Power Connector | - 5 |
| FDD Power Connector | - 1 |

| Ampere Rating | |
|---------------|----------|
| Voltage | Amperage |
| +3.3 V | - 20.0A |
| +5 V | - 35.0A |
| → +12 V1 | - 22.0A |
| -12 V | - 0.8A |
| -5 V | - 0.5A |
| + 5V SB | - 2.0A |

Max. 175W } Max. 328W

Total Output
→ 350W + 350W

Recommended Chasis
→ RM-217

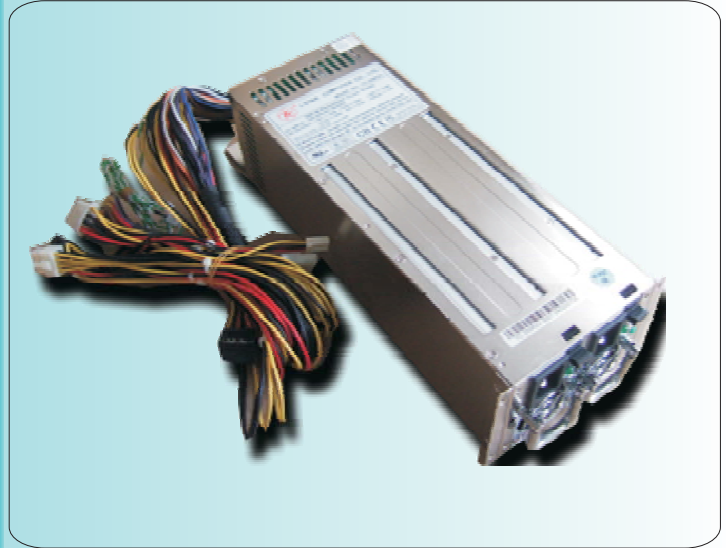

● TC-350R2U

