

G1W2-5C00V3W

Power Supply for 2U Mini Redundant Servers

SPECIFICATION

Model Name

→ G1W2-5C00V3W

Size

→ 2U Mini Redundant 1+1

Input Voltage

→ 100V - 240 V

Connectors

Mother Board Connector 24 Pins	-	1
Core Voltage Connector 8 Pins	-	1
→ Core Voltage Connector 4+4 Pins	-	1
PCI Express Connector 6+2 Pins	-	2
PCI Express Connector 6 Pins	-	2
SATA Power Connector	-	1
4 Pin Power Connector	-	14
FDD Power Connector	-	1

Ampere Rating


+3.3 V	-	36.0A	} Max.
→ +5 V	-	36.0A	
+12 V	-	98.0A	} 210W
-12 V	-	0.8A	
+5 VSB	-	3.5A	

Total Output

→ 1200W

Recommended Chasis

RM-4201
→ RM-4241

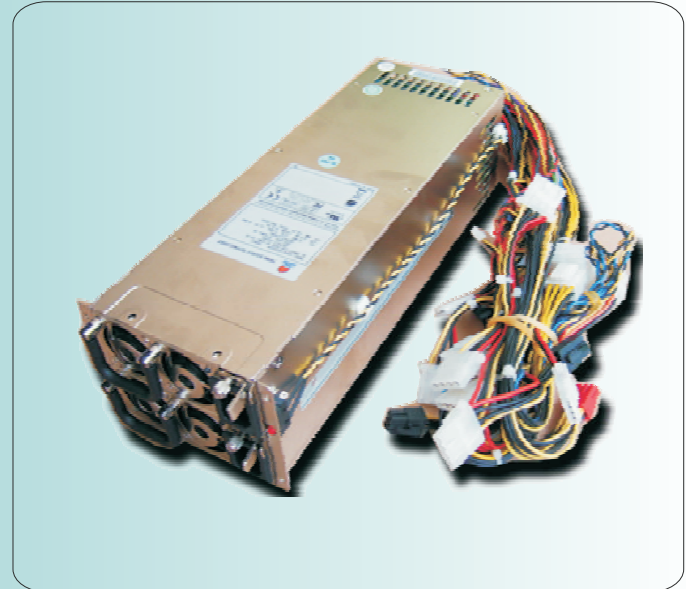

G1W2-5C00V3W



Prime Source Technologies Pvt. Ltd.
Web site : www.primesource.in