

R3G-5800P4V

Power Supply for High End Servers

SPECIFICATION

Model Name

→ R3G-5800P4V

Size

→ PS2 / 3U Mini Redundant N+1

Input Voltage

→ 90V - 264 V

Connectors

Main Board Connector 24 Pins	- 1
Core Voltage Connector 4+4 Pins	- 1
Core Voltage Connector 8 Pins	- 1
→ PCI Express Connector 6+2 Pins	- 2
SATA Power Connector	- 2
4 Pin Power Connector	- 10
FDD Power Connector	- 1

Ampere Rating


Voltage	Amperage	
+3.3 V	- 38.0A	} Max.61W
→ +5 V	- 45.0A	
+12 V	- 49.0A	} Max. 770W
-12 V	- 1.0A	
+5 VSB	- 4.0A	

Total Output

→ 800W

Recommended Chasis

→ RM-3161
RM-41416B
RM-4002
RM-4201
RM-4241

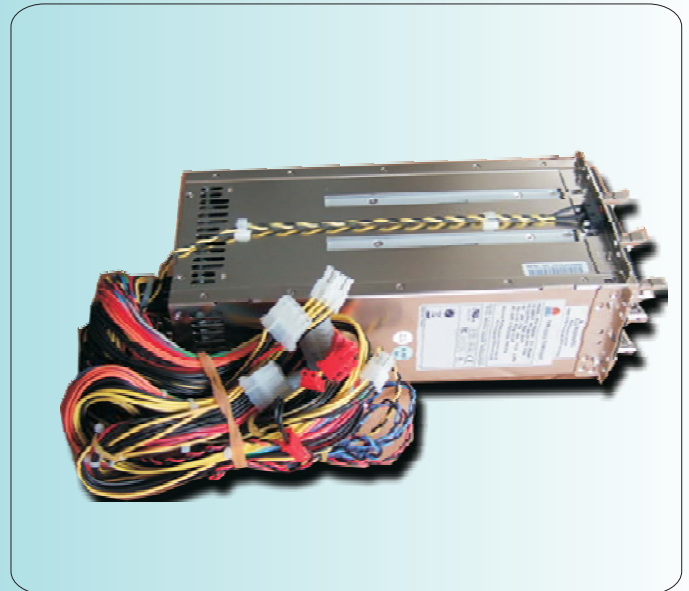

● R3G-5800P4V



Prime Source Technologies Pvt. Ltd.
Web site : www.primesource.in